

WS- Dynamic

Flow Sensor
for hot water up to 130 °C
DN 50 ... DN 150



Main characteristics

Measuring range better than metrological class C

Hermetically sealed register (IP 68)

Interchangeable measuring element

High overload capability

Up to 3 pulsers (1 x OD, 2 x RD) may be fitted without breaking the approval seal

Register may be rotated through 360°

Powder coating ensures maximum corrosion protection

Not affected by external magnetic fields

Can be used as flow sensor for heat meters

Applications

Measurement of low and medium flow rates with variable flow profile

Pattern Approval Sign

22.16

97.03

Nominal Diameter DN 50 ... DN 150

Marking:

Metrological class C
Installation H

Installation

Pipe	horizontal	
Meter head	upwards	

Installation Requirements

- Unrestricted straight pipe in front of the meter 3 x DN
- No abrupt restrictions directly behind the meter

Technical Data


Performance data WS-Dynamic for hot water

Nominal Diameter	DN	50	65	80	100	150
Size of meter (acc. to PTB-A22)	Q_n	15	25	40	60	150
Maximum peak flow (few minutes) $\pm 2\%$	Q_{max}	30	60	85	125	300
Continuous flow $\pm 2\%$	Q_n	15	25	40	60	150
Transitional flow $\pm 2\%$	Q_t	1.5	2.5	2.5	4.0	12
Minimum flow $\pm 5\%$	Q_{min}	0.25	0.30	0.30	0.50	0.80
Starting flow	m^3/h	0.06	0.07	0.10	0.15	0.50

Performance data acc. to PTB-A22-specification class C

Nominal Diameter	DN	50	65	80	100	150
Size of meter (acc. to PTB-A22)	Q_n	15	25	40	60	150
Maximum peak flow (short time) $\pm 3\%$	Q_{max}	30	50	80	120	300
Continuous flow $\pm 3\%$	Q_n	15	25	40	60	150
Transitional flow $\pm 3\%$	Q_t	1.5	2.5	4.0	6.0	15.0
Minimum flow $\pm 5\%$	Q_{min}	0.3	0.5	0.8	1.2	3.0

Typical Accuracy Curve

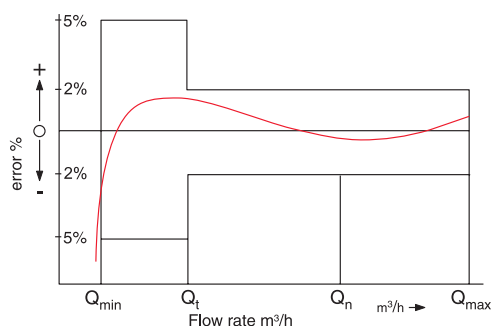


Q_{max} = maximum peak flow

Q_n = continuous flow $\pm 2\%$

Q_t = transitional flow $\pm 2\%$

Q_{min} = minimum flow $\pm 5\%$

Typical Head Loss Curve

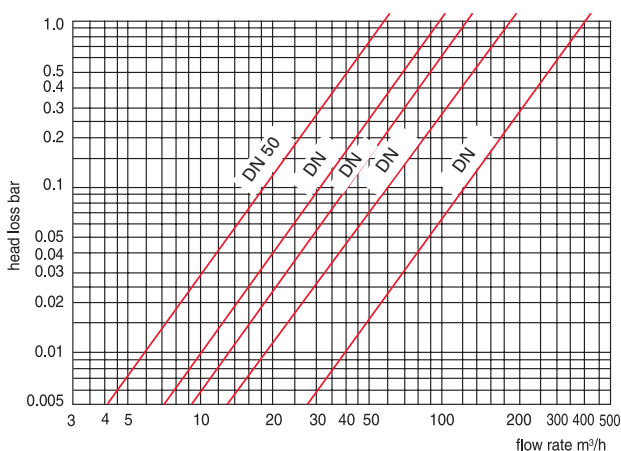

Dimensions and Weights


Pressure Rating PN 16

Nominal Diameter			DN	50	65	80	100	150
Size of meter (acc. to PTB-A22)			Q _n	15	25	40	60	150
Dimensions	overall length	L	mm	270	300	300	360	500
		H	mm	151	161	161	191	301
	height	h	mm	80	100	100	110	180
			mm	281	301	301	341	581
Weights	meter		kg	13.5	17.5	19.5	32.5	91.5
	measuring element		kg	2.5	2.5	2.5	7.5	17.5
	body		kg	11.0	15.0	17.0	25.0	74.0


Pressure Rating PN 40

Nominal Diameter			DN	50	65	80	100	150
Size of meter (acc. to PTB-A22)			Q _n	15	25	40	60	150
Dimensions	overall length	L	mm	270	300	300	360	500
		H	mm	171	171	171	211	311
	height	h	mm	80	100	100	115	180
		g	mm	291	311	311	381	581
Weights	meter		kg	19.5	24.5	27.5	48.5	114.5
	measuring element		kg	4.5	4.5	4.5	12.5	31.5
	body		kg	15.0	20.0	23.0	36.0	83.0


Dimension Picture

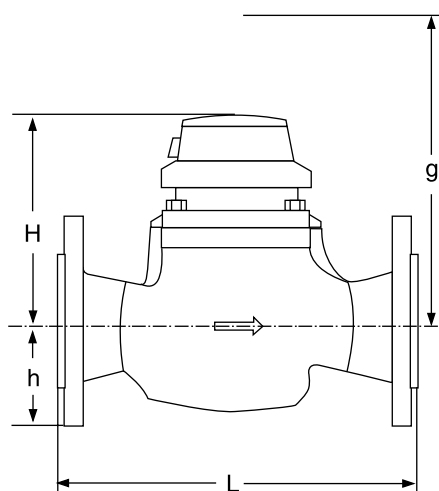

Dials



DN 50 ... DN 100



DN 150

Nominal Diameter DN	Resolution m ³	Max. reading m ³
50 ... 100	0.0005	1 000 000
150	0.005	10 000 000


Materials

Body	PN 16	cast iron
	PN 40	spheroidal cast iron
Measuring element		plastic
Rotor		plastic
We also use the following material		brass, stainless steel

Pulse Values

Pulser		Pulse value	
		DN 50 ... DN 100	DN 150
RD02 / RD022		0.25 and 0.1 m ³ or 0.25 and 0.025 m ³	2.5 and 1 m ³ or 2.5 and 0.25 m ³
OD 02		0.001 m ³	0.01 m ³
OD 04		0.01 m ³	0.1 m ³

Order Example

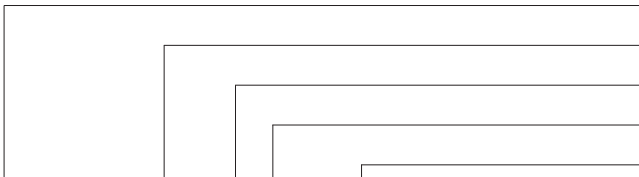	Type
	Nominal diameter
	Temperature
	Pressure rate
	Overall length
WS-Dynamic, DN 50, 130/16, L= 270 mm, 0.25/0.1 m ³	Pulse values
drilled acc. to EN 1092 PN 16	Flange drilling
82 89 11	Order no.

UK & Ireland Enquiries

Sensus UK Systems Ltd, 3 Lindenwood Crockford Lane, Chineham Business Park
Basingstoke RG24 8QY UK
T: +44 (0) 1256 372800 F: +44 (0) 1256 707203 Email: info.gb@xyleminc.com www.sensus.com

International Enquiries

Sensus GmbH Hannover Meineckestraße 10, D-30880 Laatzen Germany
T: +49 (0) 5102 74-0 F: +49 (0) 5102 74-3341 Email: info.int@xyleminc.com www.sensus.com